



ORIGINAL ARTICLE

Transportation impact on CO₂ emissions of concrete: a case study in Rio Branco/Brazil

Impacto do transporte nas emissões de CO₂ do concreto: um estudo de caso em Rio Branco/Brasil

Antonia Alana Lima Pacheco^a Lidiane Santana Oliveira^a Vanderley Moacyr John^a Sérgio Cirelli Angulo^a ^aUniversidade de São Paulo – USP, Escola Politécnica, Departamento de Engenharia de Construção Civil, São Paulo, SP, Brasil

Received 23 March 2022

Accepted 17 October 2022

Abstract: Due to the scarcity of crystalline massifs in the north of Brazil, concrete producers have been using crushed stone and cement from suppliers located hundreds of kilometers away. In this case, CO₂ emissions related to material transportation for concrete production may become significant. Thus, this study aims to analyze the influence of the transportation of the materials in CO₂ emissions of ready-mix concrete production in Rio Branco (Acre). Concrete compositions were obtained from a local concrete producer. Brazilian methods of dosage were not applicable due to the high fineness of the regional sand available; the mix designs were adjusted empirically. Two types of cement (CP V-ARI and CP IV) were considered to create the studied scenarios. Transportation distances of the raw materials (cement and aggregates) ranged from 20 km (local sand supplier) to 3,592 km (cement supplier from Sete Lagoas, MG). CO₂ emissions to produce concrete (f_{ck} of 25 MPa, cement consumption of 426 kg/m³) ranged from 208 kgCO₂/m³ to 573 kgCO₂/m³. Transportation was responsible for up to 20% of total emissions. The emissions in this study are considerably higher than the national data of concrete production available in the Construction Environmental Performance Information System (Sidac) due to the higher cement consumption and higher transportation distances. Although cement consumption in Acre represents less than 1% of Brazilian consumption, the results reveal the impact of transportation distances in CO₂ emissions of concrete in cities that deal with local scarcity.

Keywords: concrete, CO₂ emission, transportation, construction materials.

Resumo: Devido à escassez de maciços cristalinos no norte do Brasil, produtores de concreto têm usado pedra britada e cimento de fornecedores localizados a centenas de quilômetros. Nesse caso, as emissões de CO₂ relacionadas ao transporte de materiais na produção de concreto podem ser significativas. Assim, este estudo tem como objetivo analisar a influência do transporte dos materiais nas emissões de CO₂ da produção de concreto usinado em Rio Branco (Acre). As composições de concreto foram obtidas de um produtor de concreto local. Os métodos brasileiros de dosagem não foram aplicáveis devido à alta finura da areia regional disponível; os traços foram ajustados empiricamente. Dois tipos de cimento (CP V-ARI e CP IV) foram considerados para criar os cenários estudados. As distâncias de transporte das matérias-primas (cimento e agregados) variaram de 20 km (fornecedor local de areia) a 3.592 km (fornecedor de cimento de Sete Lagoas, MG). As emissões de CO₂ para a produção de concreto (f_{ck} de 25 MPa, consumo de cimento de 426 kg/m³) variaram de 208 kgCO₂/m³ a 573 kgCO₂/m³. O transporte foi responsável por até 20% do total de emissões. As emissões neste estudo são consideravelmente maiores do que os dados nacional de produção de concreto disponíveis no Sistema de Informação do Desempenho Ambiental da Construção (Sidac) devido ao maior consumo de cimento e maiores distâncias de transporte. Embora o consumo de cimento no Acre represente menos de 1% do consumo

Corresponding author: Antonia Alana Lima Pacheco. E-mail: alanapacheco@usp.br

Financial support: CNPq grant number 140054/2020-0 and CAPES grant number 88887.463874/2019-00.

Conflict of interest: Nothing to declare.

Data Availability: The data that support the findings of this study are available from the corresponding author, A. A. L. Pacheco, upon reasonable request.



This is an Open Access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

brasileiro, os resultados revelam o impacto das distâncias de transporte nas emissões de CO₂ do concreto em cidades que lidam com a escassez local.

Palavras-chave: concreto, emissão de CO₂, transporte, materiais de construção.

How to cite: A. A. L. Pacheco, L. S. Oliveira, V. M. John, and S. C. Angulo, "Transportation impact on CO₂ emissions of concrete: a case study in Rio Branco/Brazil", *Rev. IBRACON Estrut. Mater.*, vol. 15, no. 6, e15609, 2022, <https://doi.org/10.1590/S1983-41952022000600009>

1 INTRODUCTION

The growing need of concrete for habitation and urban infrastructure leads to increasing consumption of minerals for construction [1]. This happens in great part because concrete, the most consumed construction material in the world, has approximately 75% of its volume composed of aggregates [2], [3]. In the last decades, BRIC countries (Brazil, Russia, India and China) were responsible for the extraction of one third of global resources, which includes Brazil [4]. In Brazil, more than 600 million of tons of minerals have been consumed in 2016 [5], and around 50% of it was used for concrete [6], [7].

The fabrication of Portland cement also depends on the extraction of minerals as limestone (in which part of it is converted in CO₂ during production [8]) and clay, its main raw materials. Although the cement consumption decreased in the country from 2015 to 2018, consequence of the economic crisis, since 2019 it has been observed the increasing in its consumption [9] as in many other BRIC countries. The same is happening in the northern region of Brazil, which has population growth above the national average and a growing need for infrastructure in transportation, sanitation and housing for the population [9], [10].

Although the minerals used in civil construction are considered abundant in nature [11], [12], in many regions of Brazil or abroad [13], [14] these resources are far away. Areas located in sedimentary basins generally do not have hard rocks for crushing. In the northern region of Brazil, states such as Amapá, Roraima and Amazonas have rare crystalline massifs, depending on alternative materials and long-distance transportation [15], [16]. As an example, in the city of Manaus (state of Amazonas, AM) gravel is frequently used as a substitute material for crushed stone [17]. Also, in the Southern and Southeast regions, many cities located in the Paraná sedimentary basin require the transportation of coarse aggregates over distances greater than 100 km [15]. Globally, the scarcity of aggregates due to geological restrictions was also observed in the Netherlands [18], and in the central region of United States [19].

The state of Acre stands out in this scenario due to the absence of mineral deposits (Figure 1). The construction industry in this state depends mainly on coarse aggregates from the state of Rondônia. This makes the price of crushed stone the highest in Brazil, up to R\$ 286.54/m³ in April of 2022 [20]. In addition, due to the lack of limestone reserves in the region, Acre does not have cement production [21] and this material needs to be transported from neighboring states over distances that can reach up to 3,500 km.



Figure 1. Map of Brazil identifying the sedimentary basins and the State of Acre.

Cement production is the main responsible for environmental impacts of concrete, especially in CO₂ emissions from limestone decarbonation and energy consumption [22]. According to the Global Cement and Concrete Association [23], [24], the average cement emission in 2019 was 564 kg CO₂/t in Brazil and 635 kg CO₂/t in the world. The emission due to the transportation of concrete materials differs depending on the region and the means of transportation [8], being generally adopted as less than 5% of the total emissions. However, most studies consider distances of aggregates transportation between 20 and 400 km and cement transportation between 100 and 900 km [25], [26], values much lower than those found in the northern region of Brazil.

Based on this context, the objective of this work is to quantitatively analyze the impact of the material transportation stage on the CO₂ emission of the ready-mix concrete produced in the city of Rio Branco, state of Acre, in Brazil. The results were compared to the national data of concrete production available in the Construction Environmental Performance Information System (Sidac), a platform for the assessment and calculation of environmental performance indexes of Brazilian construction products.

2 METHODOLOGY

The methodology used in this work is based on the Life Cycle Assessment (LCA) framework, using a simplified approach that focus more on the inventory (quantity of natural resource extraction, and CO₂ footprint), similar to the methodology adopted by the Environmental Performance in Construction Assessment (ADAC is its acronym in Portuguese¹) [27]. It consists of an inventory analysis with the objective of quantifying the CO₂ emission of the production of concrete in the city of Rio Branco, with emphasis on the materials transportation impact.

The methodology for calculating the CO₂ emissions of concrete considered the material’s production and transportation to Rio Branco, as shown in Figure 2. All emission factors were adopted from Sidac database, as the data is up to date. The details for the method are described in item 2.1. Thus, first, it was assessed the CO₂ emissions for cement and aggregates production and transportation to Rio Branco. Then, the CO₂ emissions of a local mix design of concrete grade C25 ($f_{ck} = 25$ MPa) was calculated from the present methodology and the results were compared to the same mix design of C25 calculated using Sidac product calculator (details in item 2.2). Finally, it was calculated the maximum and minimum CO₂ emissions of concretes C15 to C35 and the results were compared to generic ready-mix concrete (C20 to C35) products available in Sidac database.

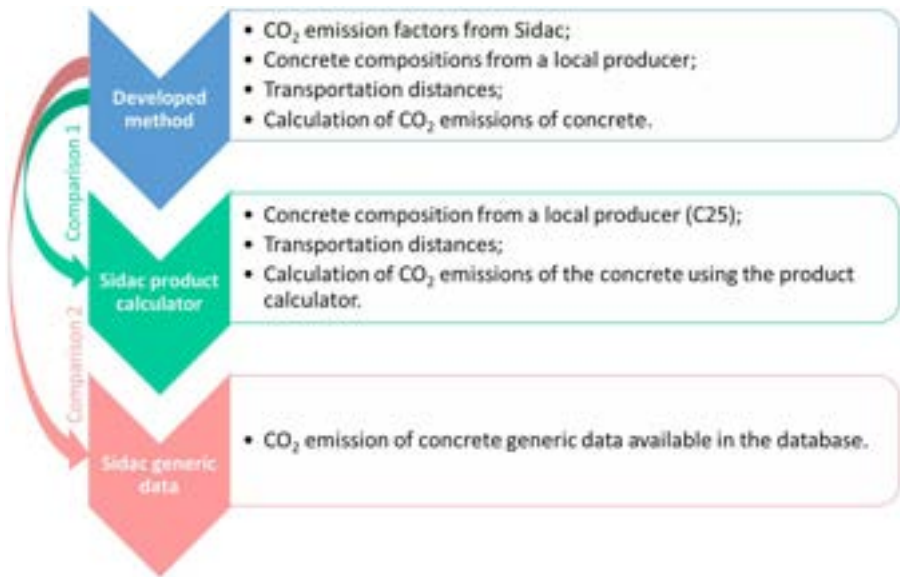


Figure 2. Flowchart of the methodology adopted in this study.

¹ Avaliação do Desempenho Ambiental da Construção.

2.1 Method to calculate CO₂ emissions of concrete

CO₂ emissions of concrete comprise the emission of the materials’ production ($E_{CO2,M}$) and their transportation to the place where concrete will be produced ($E_{CO2,T}$), a “cradle-to-gate” framework, like it is presented by the Equation 1.

$$E_{CO2,conc} = E_{CO2,M} + E_{CO2,T}$$
 (1)

In the assessment, Rio Branco was considered the only destination of the materials, whereas their origins were defined consulting local concrete plants. The materials analyzed in transportation over long distances were cement and crushed stone, as they are constituents of concrete which are not produced in the city. The transportation distance of the sand was considered fixed (one single value) because its extraction takes place within Rio Branco, not being transported over long distances. The road modal was adopted as the only means of transportation.

2.1.1 CO₂ emission factors

CO₂ emissions from raw materials used to produce concrete are the sum of the emissions from energy consumed in the production of the materials, electricity and fuels, and the emissions originated in the process due to chemical reactions [28], when they occur.

The unitary emission of cement ($E_{CO2,cem}$), given in kgCO₂/t_{cement}, was calculated from Equation 2.

$$E_{CO2,cem} = \%clinker \cdot EF_{clinker} + \%SCMs \cdot EF_{SCMs} + E_{energy,cem}$$
 (2)

Where: $\%clinker$ is the clinker content and $EF_{clinker}$ is the emission factor from clinker production, which includes the emission from limestone decarbonation and the energy to produce clinker (fossil fuels and electricity); $\%SCMs$ is the content of supplementary cementitious materials (SCMs) and EF_{SCMs} is the emission factor of SCMs, which includes the energy to produce SCMs (fossil fuels and electricity); and $E_{energy,cem}$ is the emission from electricity used in cement production during milling of clinker with SCMs.

This study limited the analysis to two types of cement with different clinker content according to the Brazilian standard, shown in Table 1. Emission factors of clinker, calcined clay and limestone fillers, such as the CO₂ emissions from energy used in cement production were adopted from Sidac data [30] and are presented in Table 2. When blast furnace slags and fly ash are used as SCMs, the emission of SCMs is considered zero.

Table 1. Cement types and their proportions according to the Brazilian standard NBR 16697 [29].

Cement ID	Cement type	Clinker content	Addition	Addition content
C1	CP V – ARI	90 – 100%	Limestone filler	0 – 10%
C2	CP IV	45 – 85%	Calcined clay	15 – 50%

Table 2. Emission factors of raw materials and energy consumed. Range (min-max) values from Sidac database [30].

CO ₂ emission source	Emission factor (kgCO ₂ /t _{material})
Clinker	845.1 – 1049
Calcined clay	144.4 – 435.6
Limestone filler	0.6 – 7.2
Sand	0 – 12.51
Crushed stone	0 – 4.67
Energy - cement	2.5 – 4.6 ²

Besides cement, the other materials composing concrete are fine and coarse aggregates, and water. The emission of the aggregates production was also collected from Sidac database [30]. CO₂ emissions from aggregates include the energy

² Calculated considering the electricity consumption of 51 kWh/t of cement ± 2 times the standard deviation of 7.3, and 0.07 kgCO₂/kWh [31].

consumed during the extraction and production process, once there is no chemical reaction like in the cement production. CO₂ emissions related to water extraction and its availability to consumption are not considered in this study.

The fuel emission factor adopted in this study was 2.29 kgCO₂/L_{diesel} from Sidac database [30], which considered the emission by direct diesel combustion and the percentage of biodiesel present in Brazilian diesel (defined as 13%). For the electricity use it was considered 0.07 kgCO₂/kWh, published by Sidac [30], which considers the Brazilian electric matrix composition.

2.1.2 Material’s consumption of concrete

According to the local ready-mix concrete producers, some of the Brazilian methods of mix design for determining the materials consumption, as ABCP method, are not applicable for the concrete of the region, which uses sand from Acre River (Rio Acre). The granulometry of sand is fine (fineness of 0.9), implying in a greater demand of water and, consequently, a greater consumption of cement in experimental dosage concrete mixes. Thus, this study considered the mix designs of a local concrete plant for different concrete grades, varying from C15 to C35. The materials were cement, sand and crushed stone (0 – 6.3 mm) as fine aggregates, crushed stone (9.5 – 19 mm) as coarse aggregate and superplasticizer admixture. The granulometries of aggregates are similar to the work of Santos [32].

Table 3 presents the material consumptions for each mix design based on the estimated f_{ck} (characteristic of compressive strength) at 28 curing days. In this work, the same materials consumption of concrete was adopted for the two different types of cement considered. It seems reasonable since the effect of granulometry of the aggregates will be the mandatory and it is constant for both cements used.

Table 3. Materials consumption for one cubic meter of concrete

Concrete grade	Estimated f_{ck} (MPa)	$C_{i,conc}$ (t/m ³)			
		Cement	Fine Sand	Crushed stone (0-6.3 mm)	Crushed stone (9.5 – 19 mm)
C15	15	0.350	0.484	0.322	1.023
C20	20	0.400	0.456	0.304	1.029
C25	25	0.426	0.438	0.294	1.026
C30	30	0.450	0.423	0.279	1.017
C35	35	0.464	0.409	0.265	1.017

2.1.3 Fuel consumption in transportation

The CO₂ emission during the materials transportation by road was determined by the fuel consumption multiplied by its emission factor. Many factors can influence the fuel consumption, such as the travel distance, vehicle efficiency, load capacity, fuel type, road conditions, driving preferences, weather, and others [33]. In this study, the fuel consumption was simplified as the traveled distance divided by the efficiency of the vehicle. Diesel was considered the only fuel type. The distances included the round trip with loaded truck in the way out and empty truck on the way back.

Minimum and maximum emission conditions were considered for vehicle efficiency, from two types of road train trucks (*bitrem*) with different diesel consumptions based on the work of Campos [34], as shown in Table 4. The information about considered load weights were obtained from concrete plant producers, adopting the maximum load weight for the minimum emission condition and the minimum load weight for the maximum emission condition. Furthermore, according to concrete producers in the region, there is no supply of bulk cement to Rio Branco.

Table 4. Load weight and efficiency of vehicles.

Emission condition	Vehicle type	Load weight, P_v (t)	Truck weight (t)	Diesel consumption factor (L _{diesel} /t.km)	Vehicle efficiency (km/L _{diesel})	
					Empty, $e_{f,e}$	Loaded, $e_{f,l}$
Minimum	Volvo FH 440 6x2	48.0	9.2	0.004	27.17	4.37
Maximum	Volvo FH 520 6x4	38.0	9.2	0.015	7.25	1.41

Table 5 presents the main cities of origin of the materials. This study considered the two types of cement presented in the previous section (C1 and C2)), each one from a different city of origin, and two cities of origin of crushed stone (B1 and B2). Road distances were collected using GoogleMaps [35], considering the shortest route simulated by the website. It was established a fixed distance for sand because its transportation takes place within Rio Branco. The cement C2 is constituted by clinker from Nobres (MT), which is transported to Porto Velho (RO) where it is mixed with calcined clay from the region, packed and distributed. Thus, the considered distance was from Nobres to Rio Branco. Figure 3 shows a map including the states of origin and destination of the materials and the transportation roads.

Table 5. Cities of origin of the materials and their distances to Rio Branco

Material	City of origin	Distance to destination (km)
Sand A	Rio Branco (AC)	20
Crushed stone B1	Porto Velho (RO)	510
Crushed stone B2	Vista Alegre do Abunã (RO)	250
Cement C1	Sete Lagoas (MG)	3,592
Cement C2	Nobres (MT) (clinker)	1,844
	Porto Velho (RO) (calcined clay)	510



Figure 3. Map of Brazil showing the states of origin and destination of the materials and the transportation roads collected using GoogleMaps (2022).

2.1.4 CO₂ emissions from transportation

Based on the methodology presented above, Equation 3 is proposed to determine the CO₂ emissions from the transportation of concrete materials ($E_{CO2,T}$), given in kgCO₂/m³ of concrete. The development of the equation is detailed in Appendix A.

$$E_{CO2,T} = EF_F \cdot \frac{e_{f,l} + e_{f,e}}{e_{f,l} \cdot e_{f,e} \cdot P_v} \sum_{i=1}^{n=3} (C_{i,conc} \cdot d_i) \tag{3}$$

Where, EF_F is the fuel emission factor (kg CO₂/L), $e_{f,e}$ is the efficiency of the empty vehicle (km/L), $e_{f,l}$ is the efficiency of the loaded vehicle (km/L), P_v is the maximum load capacity of the vehicle (t), i is the type of material (cement, sand or gravel), $C_{i,conc}$ is the consumption of material i necessary to produce 1 m³ of concrete (t/m³) and d_i is the transportation distance of the material i (km).

2.2 CO₂ emissions of concrete C25 using Sidac product calculator

The CO₂ emissions of concrete C25 were calculated using the Sidac product calculator from the data adopted in this study, i.e., type of materials, mix proportions of the local concrete C25 and transportation distances. The objective was to assess the variation in CO₂ emissions resulting from different methodologies between this study and Sidac product calculator. The main differences relied on the materials emission factors, in which Sidac uses a medium value, and the transportation method of calculation, in which it is used a single vehicle efficiency and consider the same efficiency for empty and loaded trucks.

3 RESULTS AND DISCUSSION

3.1 CO₂ emission of cement and aggregates

The results of CO₂ emission from each cement are shown in Figure 4. Cement C1 presented minimum and maximum emissions of 809 and 1,237 kgCO₂/t of cement respectively, whereas cement C2 had a lower emission range, from 478 to 1,056 kgCO₂/t. The difference between cements relies on both production and transportation stages. In the production stage, cement C1 had a greater emission range due to the higher clinker content of the CP V-ARI cement type, compared to cement C2 (CP IV), which had higher substitution of clinker for calcined clay. In Brazil, 63% of the CO₂ emissions of the cement production process, without accounting the transport, it occurs in consequence of the chemical reactions [28]. Regarding the transportation stage, the distance from the factory to Rio Branco is greater for cement C1 as well, reaching 3,592 km, thus the transportation can contribute with up to 15% of the emissions from this cement.

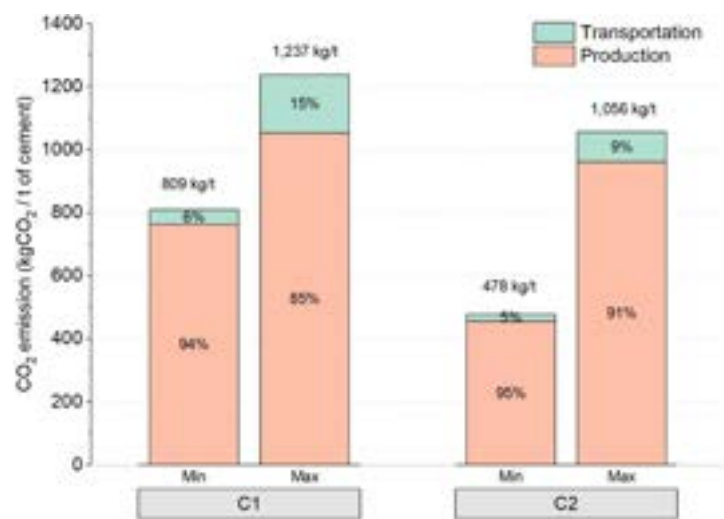


Figure 4. Minimum and maximum CO₂ emissions of cements considered in this study.

The values found in this study differ significantly from the emissions reported in the literature. In the Brazilian scenario, Lima [25] indicated a total cement emission in the range of 603 to 714 kgCO₂/t of cement. Souza [31] calculated 590 and 840 kgCO₂/t of cement for low and high emission cement, respectively, where the materials' transportation in São Paulo did not reach 1% of the total CO₂ emissions. In an international scenario the values found also differ significantly. In China, for example, a blended Portland cement emits around 543 kgCO₂/t of cement, and transportation is responsible for 2.5% of the total emission.

For the aggregates, the calculated emission ranges are displayed in Figure 5. The minimum CO₂ emission from sand was 0.25 kgCO₂/t because it was considered zero emission from production. For the maximum CO₂ emission from sand (13.5 kgCO₂/t), production was responsible for 92% of the total emission. The difference between minimum and maximum CO₂ emissions of the crushed stones (3.17 to 30.7 kgCO₂/t) consisted mostly of the transportation stage, which was responsible for 85% of the maximum value, in which the aggregate was transported for 512 km. Similar to cement, the aggregate emissions in this work were higher than other values founded in Brazilian studies, such as 2.75 kgCO₂/t obtained by Souza [31] and 23.0 kgCO₂/t calculated by Lima [25] and Marcos [36]. This is mainly due to transportation distances considered in this study, which are far above to the ones of the Southern region of Brazil.

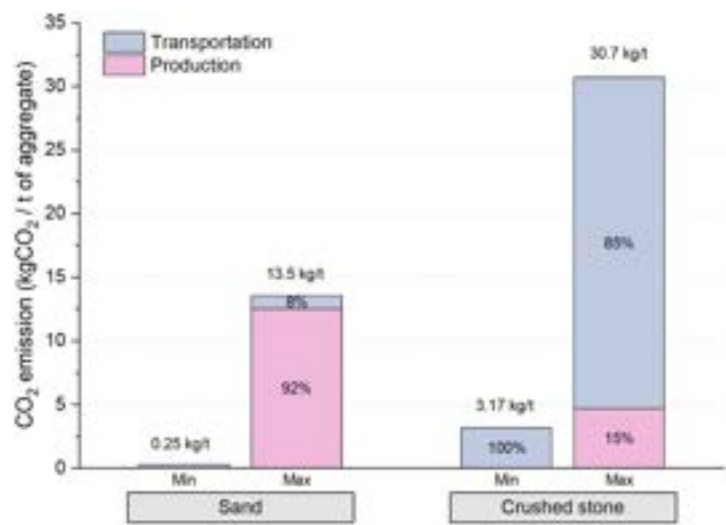


Figure 5. Minimum and maximum CO₂ emissions of aggregates.

3.2 Analysis of CO₂ emission from concrete C25

Figure 6 presents the CO₂ emissions per cubic meter of concrete for C25 concrete produced with C1 and C2 cements. Cement production was the factor that most contributed to concrete emissions, regardless the type of cement. However, in the case of concrete produced with C1, the transportation of cement and aggregates were together responsible for up to 20% of the total concrete emissions, which added up 113 kgCO₂/m³ of concrete to a maximum of 573 kgCO₂/m³. This value is far above the emission ranges of Brazilian references [37], which point to a maximum emission of approximately 350 kgCO₂/m³ of concrete for this concrete grade. The concrete produced with C2 cement showed lower emissions, in the range of 208 to 496 kg CO₂/m³ of concrete. Thus, in this study case, the value of 5% generally adopted to concrete emissions from raw materials transportation does not apply.

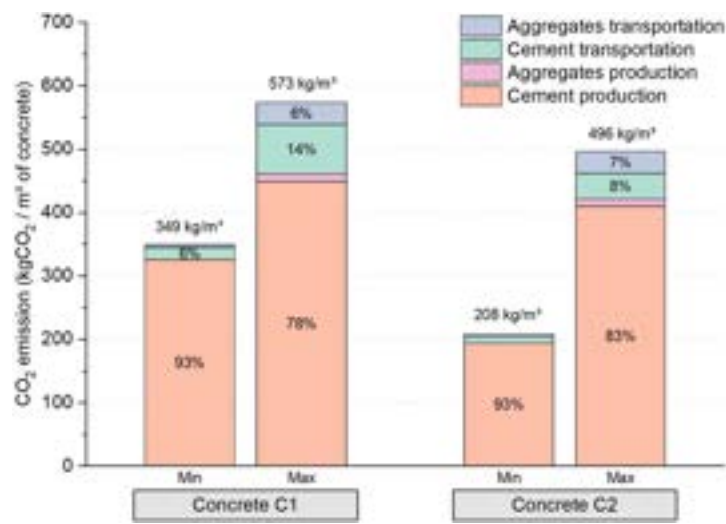


Figure 6. Minimum and maximum CO₂ emissions from C25 concrete with C1 and C2 cements.

The large variation between the minimum and maximum emissions found in Figure 6 is mainly due to the range of emissions from cement production. However, in the maximum emission conditions, the transportation stage was considerable. The parameter with the larger influence in the transport emission is the fuel consumption factor, a value that depends on the transportation distances, type of vehicle, vehicle efficiency, transported load and others [33]. For long distances, the difference in fuel consumption accentuates emissions.

Figure 7 presents the values of CO₂ emissions from the same C25 concrete but estimated from Sidac calculator tool and its database, available in its website³ [30]. It is observed that the maximum emission values of both concrete produced with cement C1 and C2 were similar to the ones calculated in this study. However, the minimum values estimated by Sidac calculator were considerably higher than from this study calculation, for both production and transportation stages. In the production stage, this happened because Sidac database considers a medium value of clinker in the composition of the cements, while in this study was consider the minimum and maximum clinker content indicated by the Brazilian standard for Portland cement, ABNT NBR 16697 [29]. In the transportation stage, Sidac database considers only one type of vehicle, differently what was considered in this study, and simplifies the calculation by adopting the same vehicle efficiency for empty or loaded trucks.

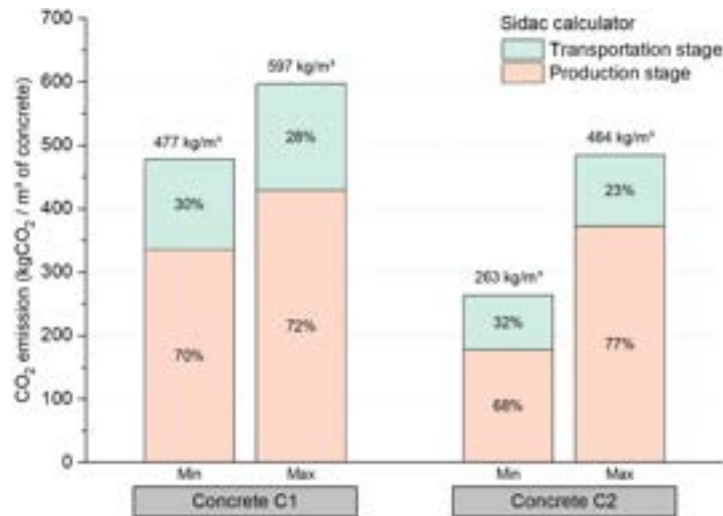


Figure 7. Minimum and maximum CO₂ emissions from C25 concrete estimated using the Sidac calculator and its database.

3.3 CO₂ emissions of different concrete strength: comparison with Sidac database

The emissions for concretes of different strength with C1 cement are calculated. There is an increase in the emissions with increasing strength (Figure 8). C15 concrete has a maximum emission of 481 kgCO₂/m³, while C35 concrete has a maximum emission of 619 kgCO₂/m³. The increase in emissions was due to increasing cement consumption. For all strength values, the transportation stage obtained similar proportions in relation to the total emission of concrete, approximately 7% for the minimum emissions and 20% for the maximum emissions of each mix.

Figure 8 also presents the CO₂ emissions of different concrete grades obtained in Sidac products, as being an average of Brazilian data. Even the concrete with the lowest strength (and the lowest consumption of cement) presented a maximum emission higher than the Brazilian Sidac estimates [37]. This difference is attributed to two main factors. First, the high cement consumption in the mix design for concretes produced in Rio Branco, since Brazilian methods of dosage were not applicable, being adjusted empirically because of the characteristics of the regional sand (fineness of 0.9) [32]. The cement consumptions of concretes C20 to C35 of Sidac products varied from 0.260 to 0.385 ton of cement per cubic meter of concrete; values much lower than those generally adopted in Rio Branco. Secondly, for the emission in the transportation of materials, a medium value of transportation distances of 564 km for cement and 80 km for crushed stone were considered by Sidac, far below than those found in this study case. Thus, it is possible to conclude that the range of CO₂ emissions from concrete calculated by Sidac Brazilian averages does not include the reality of the city of Rio Branco.

Most of the data considered to calculate the indicators of Sidac's concrete processes refer to the Southeast region of Brazil, which represents 47% of ready-mix concrete production in the country [38]. Thus, although the Sidac database has a representative sample, it does not include extreme conditions observed in specific regions of Brazil, where there is a shortage of some minerals, such as in Acre. Because the cement consumption in this state represents only 1% of the national cement consumption, the impact on national data may be insignificant. Nevertheless, the adoption of the data available in Sidac must be done with caution and analysis of data consistency must be done for specific regions and cases.

³ <https://sidac.org.br/>

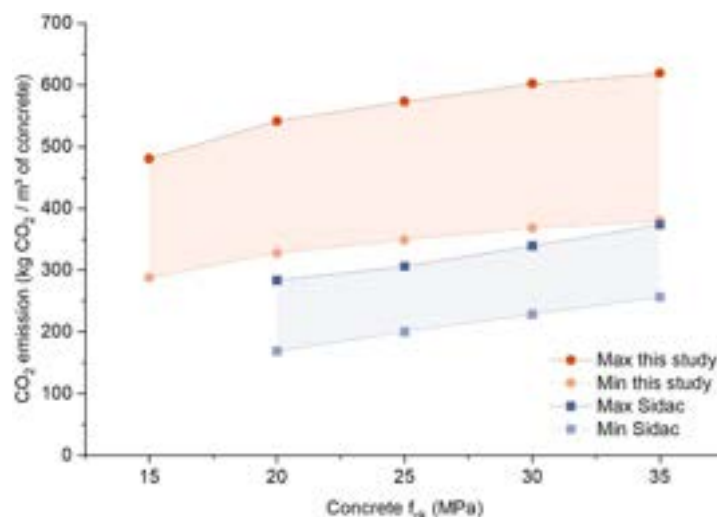


Figure 8. CO₂ emissions for concretes of different grades produced in Acre calculated using the methodology developed in the study in comparison with CO₂ emissions for similar concretes available in the Sidac database.

Thus, because of both higher cement consumption and longer transportation distances, CO₂ emissions of concrete produced in Acre are substantially higher than usual from Brazil. Comparing the results of CO₂ emissions of concrete calculated in this study with some which can be found in Brazilian literature, none are representative to Acre. Oliveira presents the maximum emission for concrete with 20 MPa as 270 kgCO₂/m³ and with 40 MPa as 392 kgCO₂/m³ [39]. Santoro and Kripka present 123 kgCO₂/m³ to concrete with 20 MPa and 168 kgCO₂/m³ to concrete with 40 MPa [40]. The use of generic data must be avoided if possible. Sidac offers cradle-to-gate emission data for different cement types and aggregates, emission factors for various transportation modals as well as a convenient calculator to make the estimative. This certainly allows a more accurate estimative considering actual formulation, transportation distances.

4 CONCLUSIONS

Considering the compositions analyzed in this study, ready-mixed concrete produced in Rio Branco has higher CO₂ emissions than concrete produced in other regions of Brazil. Cement content and transportation of materials contribute significantly to CO₂ emissions in all concrete strength. We estimate emissions of up to 573 kgCO₂/m³ of C25 concrete, where transportation was responsible for 20% of the total emissions. The CO₂ emissions will increase with concrete strength increases.

The transportation fuel consumption is the most influencing factor on the transportation emissions. This value depends on the transportation distances, type of vehicle, vehicle efficiency, transported load and others.

Therefore, Sidac's generic Brazilian data is not representative for the case of the city of Rio Branco and possible other regions with long transportation distances for aggregate or higher cement consumption associated to aggregate characteristics.

We recommend care on use generic data and always consider use other Sidac information to make accurate estimative considering actual transportation distances and cement consumption.

ACKNOWLEDGEMENTS

A. A. L. Pacheco acknowledges CNPq grant number 140054/2020-0 and L. S. Oliveira acknowledges CAPES grant number 88887.463874/2019-00. The authors would like to thank the local specialist who helped with information about the region.

REFERENCES

- [1] F. Krausmann, S. Gingrich, N. Eisenmenger, K. Erb, H. Haberl, and M. Fischer-Kowalski, "Growth in global materials use, GDP and population during the 20th century," *Ecol. Econ.*, vol. 68, pp. 2696–2705, 2009, <http://dx.doi.org/10.1016/j.ecolecon.2009.05.007>.
- [2] A. M. Neville, *Properties of Concrete*, 5th ed. Harlow, England: Pearson, 2016.

- [3] A. Miatto, H. Schandl, T. Fishman, and H. Tanikawa, "Global patterns and trends for non-metallic minerals used for construction: Global non-metallic minerals account," *J. Ind. Ecol.*, vol. 21, pp. 924–937, 2017, <http://dx.doi.org/10.1111/jiec.12471>.
- [4] R. Wu, Y. Geng, and W. Liu, "Trends of natural resource footprints in the BRIC (Brazil, Russia, India and China) countries," *J. Clean. Prod.*, vol. 142, pp. 775–782, 2017, <http://dx.doi.org/10.1016/j.jclepro.2016.03.130>.
- [5] Agência Nacional de Mineração, *Sumário Mineral 2017*. Brasília, Brasil: ANM, 2019.
- [6] D. Costa Reis, Y. Mack-Vergara, and V. M. John, "Material flow analysis and material use efficiency of Brazil's mortar and concrete supply chain," *J. Ind. Ecol.*, vol. 23, pp. 1396–1409, 2019, <http://dx.doi.org/10.1111/jiec.12929>.
- [7] D. C. Reis, "Fluxo de materiais e eficiência no uso de recursos na indústria da construção," Ph.D. dissertation, Dep. Eng. Constr. Civ., Univ. São Paulo, São Paulo, Brasil, 2020. [Online]. Available: <https://doi.org/10.11606/T.3.2020.tde-26052021-100321>
- [8] IEA CSI, "Technology roadmap: Low-carbon transition in the cement industry". <https://iea.org/reports/technology-roadmap-low-carbon-transition-in-the-cement-industry> (accessed Mar. 23, 2018).
- [9] Sindicato Nacional das Indústrias de Cimento, "Relatório Anual 2020". http://snic.org.br/assets/pdf/relatorio_anual/rel_anual_2020.pdf (accessed Mar. 23, 2021).
- [10] R. R. Silva and C. J. C. Bacha, "Acessibilidade e aglomerações na Região Norte do Brasil sob o enfoque da Nova Geografia Econômica," *Nova Econ.*, vol. 24, pp. 169–190, 2014.
- [11] B. L. Weaver and J. Tarney, "Empirical approach to estimating the composition of the continental crust," *Nature*, vol. 310, pp. 575–577, 1984, <http://dx.doi.org/10.1038/310575a0>.
- [12] K. L. Scrivener, "Options for the future of cement," *Indian Concr. J.*, vol. 88, pp. 11–21, 2008.
- [13] G. Habert, Y. Bouzidi, C. Chen, and A. Jullien, "Development of a depletion indicator for natural resources used in concrete," *Resour. Conserv. Recycling*, vol. 54, pp. 364–376, 2010, <http://dx.doi.org/10.1016/j.resconrec.2009.09.002>.
- [14] D. Ioannidou, G. Meylan, G. Sonnemann, and G. Habert, "Is gravel becoming scarce? Evaluating the local criticality of construction aggregates," *Resour. Conserv. Recycling*, vol. 126, pp. 25–33, 2017, <http://dx.doi.org/10.1016/j.resconrec.2017.07.016>.
- [15] H. de La Serna and M. M. Rezende, "Agregados para a construção civil", in *Economia Mineral do Brasil*, Departamento Nacional de Produção Mineral, Ed. Brasília, Brasil: DNPM, 2009, p. 764. [Online]. Available: <http://www.dnpm.gov.br/dnpm/publicacoes/serie-estatisticas-e-economia-mineral/outras-publicacoes-1/>
- [16] A. Luz, S. Almeida, *Manual de Agregados para a Construção Civil*, 2. ed. Rio de Janeiro, Brasil: CETEM/MCTI, 2012.
- [17] E. M. Cabral, "Fabricação de concreto com agregado de argila calcinada produzida com solo do pólo oleiro do Amazonas", M.S. thesis, Univ. Fed. Amazonas, Manaus, Brasil, 2008. [Online]. Available: <https://tede.ufam.edu.br/bitstream/tede/3482/1/Dissertacao%20Final%20Edisley.pdf>
- [18] E. F. J. Mulder, "A geological approach to traditional and alternative aggregates in the Netherlands," *Bull. Int. Assoc. Eng. Geol.*, vol. 29, pp. 49–57, 1984, <http://dx.doi.org/10.1007/BF02594374>.
- [19] W. H. Langer, *Aggregate Resource Availability in the Conterminous United States, Including Suggestions for Addressing Shortages, Quality, and Environmental Concerns*. Reston, VA, USA: U.S. Geological Survey, 2011. Accessed: May 24, 2022. [Online]. Available: https://pubs.usgs.gov/of/2011/1119/pdf/OF11-1119_report_508.pdf.
- [20] Caixa Econômica Federal, *SINAPI: Referências de Preços de Insumos AC Desonerado (Abril/2022)*. Brasília, Brazil: Caixa Econômica Federal, 2022.
- [21] Sindicato Nacional da Indústria do Cimento, "Produção nacional de cimento por regiões e estados 2017" <http://snic.org.br/assets/pdf/numeros/1537281236.pdf> (accessed May 24, 2018).
- [22] K. L. Scrivener, V. M. John, and E. M. Gartner, "Eco-efficient cements: Potential economically viable solutions for a low-CO₂ cement-based materials industry," *Cement Concr. Res.*, vol. 114, pp. 2–26, 2018.
- [23] Global Cement and Concrete Association, *GNR - Indicator Gross CO₂ Emissions - World, GNR Project Reporting CO₂*. London, United Kingdom: GNR Project Management Committee, 2022.
- [24] Global Cement and Concrete Association, *GNR - Indicator Gross CO₂ Emissions - Brazil, GNR Project Reporting CO₂*. London, United Kingdom: GNR Project Management Committee, 2022.
- [25] J. A. R. Lima, "Avaliação das consequências da produção de concreto no Brasil para as mudanças climáticas", Ph.D. dissertation, Universidade de São Paulo, São Paulo, Brasil, 2010.
- [26] D. Costa Reis and V. John, *Relatório de Coleta de Dados para o Sistema de Informação do Desempenho Ambiental da Construção: Concreto*. São Paulo, Brasil: Sidac, 2022.
- [27] V. M. John et al., "Proposta de método prático para avaliar o desempenho ambiental no ciclo de vida da construção", *Concreto & Construções*, 48-56, 2020. <http://dx.doi.org/10.4322/1809-7197.2020.100.0002>.
- [28] Sindicato Nacional das Indústrias de Cimento, "Roadmap Tecnológico do Cimento - Potencial de redução das emissões de carbono da indústria do cimento brasileira até 2050" (accessed May 24, 2019). https://www.dropbox.com/s/9cbtjlc9ouqif8/Roadmap%20Tecnol%C3%B3gico%20do%20Cimento_Brasil.pdf?dl=0.
- [29] Associação Brasileira de Normas Técnicas, *Cimento Portland – Requisitos*, ABNT NBR 16697:2018, 2018.

- [30] SIDAC: Sistema de Informação do Desempenho Ambiental da Construção. <https://sidac.org.br> (accessed May 1, 2019).
- [31] M. P. R. Souza, “Avaliação das emissões de CO₂ antrópico associadas ao processo de produção e concreto, durante a construção de um edifício comercial, na região metropolitana de São Paulo,” M.S. thesis, IPT, São Paulo, Brasil, 2012.
- [32] D. P. Santos, “Estudo sobre a utilização de cinza da casca da castanha do Brasil como adições em traços de concreto,” M.S. thesis, Univ. Fed. Acre, Rio Branco, Brasil, 2015.
- [33] A. L. A. Novo, “Perspectivas para o consumo de combustível no transporte de carga no Brasil: Uma comparação entre os efeitos estrutura e intensidade no uso final de energia do setor”, M.S. thesis, COPPE/UFRJ, Rio de Janeiro, Brasil, 2016.
- [34] É. F. Campos, “Emissão de CO₂ da madeira serrada da Amazônia: O caso da exploração convencional”, M.S. thesis, POLI, Univ. São Paulo, São Paulo, Brasil, 2012.
- [35] Google, “Google Maps”. <http://maps.google.com> (accessed May 1, 2022).
- [36] M. H. C. Marcos, “Análise da emissão de CO₂ em edificações através do uso de uma ferramenta CAD-BIM”, in *SIGraDi 2009*, E. Nardelli and C. Vincent, Eds. São Paulo, Brazil, Nov. 2009, pp. 54-58.
- [37] V. C. H. C. Oliveira, B. L. Damineli, V. Agopyan, and V. M. John, "Estratégias para a minimização da emissão de CO₂ de concretos," *Ambient. Constr.*, vol. 14, pp. 167–181, 2014, <http://dx.doi.org/10.1590/S1678-86212014000400012>.
- [38] D. C. Reis and V. John, “Concreto dosado em central fck 25Mpa – Sidac.” <https://sidac.org.br/produtos/119> (accessed June 6, 2022).
- [39] V. C. H. C. Oliveira, “Estratégias para minimização da emissão de CO₂ de concretos estruturais”, M.S. thesis, POLI, Univ. São Paulo, São Paulo, Brasil, 2015.
- [40] J. F. Santoro and M. Kripka, "Determinação das emissões de dióxido de carbono das matérias primas do concreto produzido na região norte do Rio Grande do Sul," *Ambient. Constr.*, vol. 16, pp. 35–49, 2016, <http://dx.doi.org/10.1590/s1678-86212016000200078>.

Author contributions: AALP: conceptualization, formal analysis, investigation, methodology, visualization, writing – original draft; LSO: conceptualization, formal analysis, investigation, methodology, visualization, writing – review and editing; VMJ, SCA: conceptualization, investigation, supervision, writing – review and editing.

Editors: Edna Possan, Mark Alexander

APPENDIX A – Development of the equation of CO₂ emissions from materials transportation

This Appendix presents the development of the equations for calculating CO₂ emissions from materials transportation.

First, it is understood that the CO₂ emission from transportation of a material i ($E_{CO_2,Ti}$), in kgCO₂, occurs from burning the fuel and it is obtained by the fuel consumption multiplied by its emission factor, as shown in Equation A1.

$$E_{CO_2,Ti} = EF_F \cdot C_F \quad (A1)$$

where, EF_F is the fuel emission factor (kgCO₂/L) and C_F is the fuel consumption (L).

The fuel consumption (C_F), in liter (L), modeled for the round trip of the vehicle, can be written as shown in Equation A2.

$$C_F = \frac{d}{e_{f,l}} + \frac{d}{e_{f,e}} \quad (A2)$$

where, d is the traveled distance (km) and $e_{f,l}$ and $e_{f,e}$ are the efficiencies of the loaded and empty vehicle, respectively (km/L_{diesel}).

To determine the fuel consumption of transporting each material to produce one cubic meter of concrete ($C_{F,i}$), in L/m³, the fuel consumption should be multiplied by the number of trucks needed for transporting this material. The estimate of the number of trucks is made by the consumption of the material i necessary to produce one cubic meter of concrete as function of the vehicle's load capacity, as shown in Equation A3.

$$C_{F,i} = \frac{C_{i,conc}}{P_v} \left(\frac{d_i}{e_{f,l}} + \frac{d_i}{e_{f,e}} \right) \quad (A3)$$

where, i is the type of material (cement, sand or gravel), $C_{i,conc}$ is the consumption of a material i necessary to produce 1 m³ of concrete (t/m³), P_v is the maximum load capacity of the vehicle (t) and d_i is the transportation distance of the material i (km).

Finally, as the CO₂ emission from the transportation of concrete materials ($E_{CO_2,T}$), given in kgCO₂/m³ of concrete, is the sum of the emission of transporting each material, we arrive at Equation A4 and its simplification, Equation A5, the last one presented in the body of the work.

$$E_{CO_2,T} = EF_F \cdot \sum_{i=1}^{n=3} \left(\frac{C_{i,conc} \cdot d_i}{P_v \cdot e_{f,l}} + \frac{C_{i,conc} \cdot d_i}{P_v \cdot e_{f,e}} \right) \quad (A4)$$

$$E_{CO_2,T} = EF_F \cdot \frac{e_{f,l} + e_{f,e}}{e_{f,l} \cdot e_{f,e} \cdot P_v} \sum_{i=1}^{n=3} (C_{i,conc} \cdot d_i) \quad (A5)$$